


ENERGY MASTER[®] 330W EVER-START[®] ENERGY SAVING, RETROFIT METAL HALIDE LAMPS

SAVINGS AS SIMPLE AS A LAMP... WHO KNEW?

DESIGNED TO WORK ON EXISTING PROBE OR PULSE START BALLASTS

- Energy Savings of \$140.00 Over the Life of the Lamp*
- Just Change the Lamp and Save!
- 23% Better Lumen Maintenance (LLD of 0.80 versus 0.65)
- Save 70 Watts in Comparison to 400W Lamp

NOTE: * Based on \$0.10 kWh

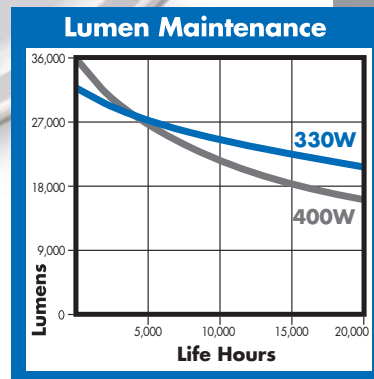


WORKS IN ALL APPLICATIONS, INCLUDING:

Flood Lighting



Site Lighting

Highbays



- Replace 400W/U and Save 18% Energy
- Operates on Probe or Pulse Start Ballasts
- Energy-Saving Green Technology
- White Light



VENTURE'S **EVER-START**[®] ENERGY-SAVING RETROFIT LAMPS



330W Ever-Start[®] Open Rated Pulse Start/Probe Start Lamps ANSI Type-O

Lamp Description	Product No.	ANSI Code	Initial Lumens	LLD	LPW	Rated Life (hrs)	CCT	CRI	Finish	Oper. Pos.	Case Fig. Qty	Replaces	Watts Saved	Additional Notes
MPI 330W/U/EM	87645	M59/155/O	31500	0.80	95	20000	4000K	70	Clear	U	F 6	400/U; 400/BU	70	
MPI 330W/BU/EM	91834	M59/155/O	31500	0.80	95	20000	4000K	70	Clear	BU±15°	F 6	400/BU	70	
MPI 330W/C/BU/EM	91844	M59/155/O	30000	0.80	91	20000	3700K	70	Coated	BU±15°	F 6	400/C/BU	70	

Benefits

- Just change the lamp not the ballast
- Save energy
- Open rated lamps available

Applications

- Energy Saving Applications Indoors or Outdoors
- Industrial Highbay
- Building and Security Floodlighting
- Warehouse Downlighting
- Parking Lot Lighting

Save Energy, with Same Light Output! A Simple Energy Saving Lamp Designed to Operate on Existing 400 Watt Ballasts

Existing Wattages	Initial Lumens	Energy Master [®] Replacement	Annual Energy Savings
400W	31,500	330W	\$25.50

Based on 10 hrs/day, 0.10 kWh

A Simple Lamp Change Does It!

Save Up to 70 watts per Fixture! Venture Lighting's Energy Master line of retrofit products saves energy by operating at lower wattages.

See an immediate reduction in energy costs of up to 70 watts per fixture or a full 18% with virtually the same light output.

Change Just the Lamp!

That's it! The high cost of a whole new lighting system or the labor cost of re-wiring or installing new wiring is not needed with Venture's Energy Master energy saving retrofit lamps. Use existing luminaires and ballasts, probe start or pulse start, Ever-Start lamps work on both ballast-types.

Retrofit for Safety

For applications where safety is an issue, Venture Lighting's Ever-Start lamps are open-rated, meeting NEC[®] (National Electric Code) requirements. The arc tube is enclosed within a quartz shroud to prevent the outer glass jacket from breaking in the event of an arc tube rupture, passing ANSI containment tests. Lamps are intended primarily for open-rated fixtures and provide an added measure of safety in enclosed fixtures.



Dia. = 4.6" (120mm)
MOL = 11.5" (292mm)
LCL = 7.0" (178mm)
Base = Mogul (EX39)



(800) 451-2606
or (440) 248-3510

Fax: (800) 451-2605
7905 Cochran Road
Glenwillow, Ohio 44139 USA
E-mail: venture@adlt.com

VentureLighting.com



VENTURE
LIGHTING