

775 Watt Pulse Start Lamp

24983 DATA SHEET



Natural White®

MP 775W/BU/BT37/PS/950

GENERAL Characteristics

Lamp Type	MH Pulse Start Single Ended
ANSI Code	M181/O
Bulb Shape	BT37
Base Type	Mogul (EX39)
Bulb Finish	Clear
Rated Life	26000 hours
Operating Position	Base Up ±15

ELECTRICAL

Lamp Watts	775
Lamp Oper. Voltage (Nom.)	220

PHOTOMETRIC



Initial Lumens	66000
Lumens Per Watt	85
Lamp Lumen Depreciation (LLD)	0.90 (90%) @ 8000 hours
Correlated Color Temperature	5000K
Chromaticity Coordinates (CIE-x,y)	.346 .359
Color Rendering Index (CRI) R_a	90+

SUSTAINABILITY

Mercury Amount (mg)	70.5
Picograms of Hg per Mean Lumen Hour	46

NOTES




- Lamp performance ratings published in this data sheet are based upon operation with magnetic ballasts.
- Operation of position-rated lamps outside of their tolerances will result in poor performance.
- Minimum Starting Temperature: -40°C/°F.
- To calculate nighttime Scotopic lumens, multiply the lumen rating by the S/P ratio (2.1).
- Nominal color temperature rating is based on Vertical (±15°) operation of the lamp. Off-vertical positions will result in higher color temperature.



Dia. = 4.6" (120mm)
MOL = 11.5" (292mm)
LCL = 7.0" (178mm)
Base = Mogul (EX39)

PHYSICAL

Bulb Diameter	4.6" (120mm)
Max. Overall Length (MOL)	11.5" (292mm)
Light Center Length (LCL)	7.0" (178mm)
Effective Arc Length	64.5 mm
Max. Base Temperature (°C)	250
Max. Bulb Temperature (°C)	450
Socket Pulse Rating (KV)	4
Luminaire Type	Open / Enclosed Rated

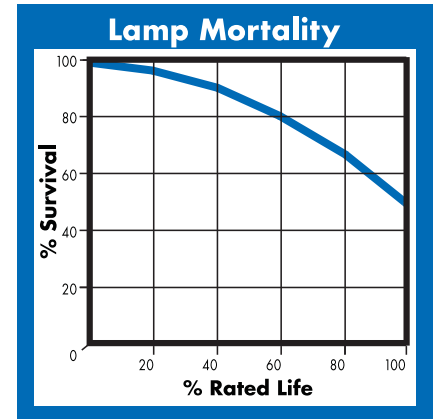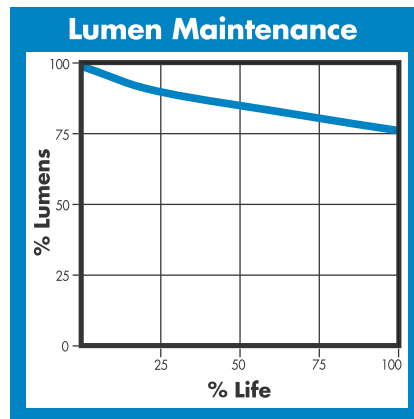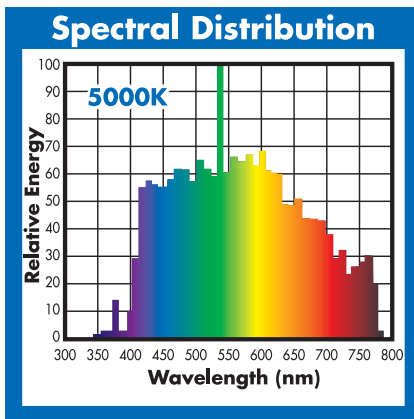

(800) 451-2606

7905 Cochran Road, Suite 300
Glenwillow, Ohio 44139 USA

E-mail: Venture_Lighting@VentureLighting.com

VentureLighting.com

THIS LAMP CONFORMS TO FEDERAL STANDARD 21 CFR 1040.30
Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives

Warning: This lamp can cause skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when outer envelope is broken or punctured are commercially available.