

70 Watt Pulse Start Lamp

15632 DATA SHEET




UNI-FORM
PULSE START METAL HALIDE LIGHTING SYSTEMS

SUPER PULSE START

Long Life (SPL)

Extended Life Lamps



Universal
Any Position

ED17



Dia. = 2.1" (54mm)
MOL = 5.4" (138mm)
LCL = 3.4" (86mm)
Base = Medium (E26)

MHL 70W/U/ED17/PS/740 GENERAL Characteristics

Lamp Type	MH Pulse Start Single Ended
ANSI Code	M98/E
Bulb Shape	ED17
Base Type	Medium (E26)
Bulb Finish	Clear
Rated Life	40000 hours
Operating Position	Universal

ELECTRICAL

Lamp Watts	70
Lamp Oper. Voltage (Nom.)	85

SUSTAINABILITY

Mercury Amount (mg)	14.0
Picograms of Hg per Mean Lumen Hour	78

PHOTOMETRIC




Initial Lumens	5600
Lumens Per Watt	80
Lamp Lumen Depreciation (LLD)	0.80 (80%) @ 16000 hours
Correlated Color Temperature	4000K
Chromaticity Coordinates (CIE-x,y)	.385 .390
Color Rendering Index (CRI) R_a	68

PHYSICAL

Bulb Diameter	2.1" (54mm)
Max. Overall Length (MOL)	5.4" (138mm)
Light Center Length (LCL)	3.4" (86mm)
Effective Arc Length	10.2mm
Max. Base Temperature (°C)	210
Max. Bulb Temperature (°C)	400
Socket Pulse Rating (KV)	4
Luminaire Type	Enclosed Rated

NOTES

- Lamp performance ratings published in this data sheet are based upon operation with approved electronic ballasts.
- Performance ratings of Universal lamps are based upon Vertical ($\pm 15^\circ$) operation.
- Minimum Starting Temperature: $-40^\circ\text{C}/^\circ\text{F}$.
- To calculate nighttime Scotopic lumens, multiply the lumen rating by the S/P ratio (1.7).

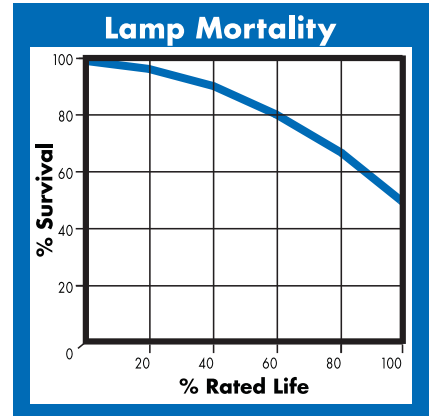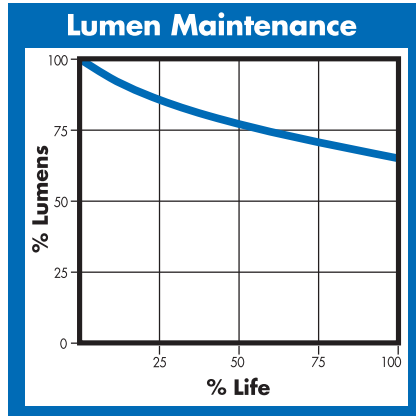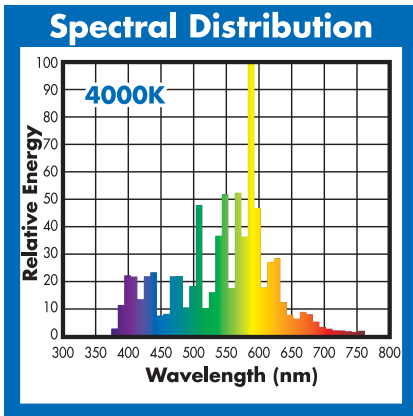

(800) 451-2606

7905 Cochran Road, Suite 300
Glenwillow, Ohio 44139 USA

E-mail: Venture_Lighting@VentureLighting.com

VentureLighting.com

THIS LAMP CONFORMS TO FEDERAL STANDARD 21 CFR 1040.30
Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives

Warning: This lamp can cause skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when outer envelope is broken or punctured are commercially available.