

# 350 Watt Pulse Start Lamp

# 11087

## DATA SHEET



**UNI-FORM**  
PULSE START METAL HALIDE LIGHTING SYSTEMS


**SUPER PULSE START**

**Long Life (SPL)**

*Extended Life Lamps*



**ED28**



Dia. = 3.5" (90mm)  
MOL = 8.3" (211mm)  
LCL = 5.0" (127mm)  
Base = Mogul (E39)

## MHL 350W/C/H75/ED28/PS/737

### GENERAL Characteristics

Lamp Type	MH Pulse Start Single Ended
ANSI Code	M131/E
Bulb Shape	ED28
Base Type	Mogul (E39)
Bulb Finish	Coated
Rated Life	40000 hours
Operating Position	Horizontal ±75°

### ELECTRICAL

Lamp Watts	350
Lamp Oper. Voltage (Nom.)	135

### SUSTAINABILITY

Mercury Amount (mg)	56.0
Picograms of Hg per Mean Lumen Hour	52

### PHOTOMETRIC

Initial Lumens	31000
Lumens Per Watt	89
Lamp Lumen Depreciation (LLD)	0.86 (86%) @ 16000 hours
Correlated Color Temperature	3700K
Chromaticity Coordinates (CIE-x,y)	.385 .390
Color Rendering Index (CRI) $R_a$	70


### PHYSICAL

Bulb Diameter	3.5" (90mm)
Max. Overall Length (MOL)	8.3" (211mm)
Light Center Length (LCL)	5.0" (127mm)
Effective Arc Length	N/A
Max. Base Temperature (°C)	210
Max. Bulb Temperature (°C)	400
Socket Pulse Rating (KV)	4
Luminaire Type	Enclosed Rated


### NOTES

- Lamp performance ratings published in this data sheet are based upon operation with approved electronic ballasts.
- Operation of position-rated lamps outside of their tolerances will result in poor performance.
- Minimum Starting Temperature: -40°C/°F.
- To calculate nighttime Scotopic lumens, multiply the lumen rating by the S/P ratio (1.7).
- \*\*LEED V3, MR CREDIT 4: Sustainable Purchasing - Reduced Mercury in Lamps is awarded 1 point for projects which at least 90% of all mercury-containing lamps purchased during the performance
- period comply and meet the target for mercury content of 90 picograms per lumen-hour or less.


### Spectral Distribution

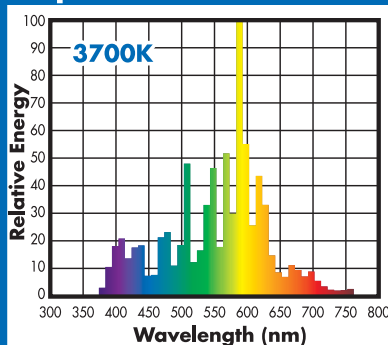

### Lumen Maintenance

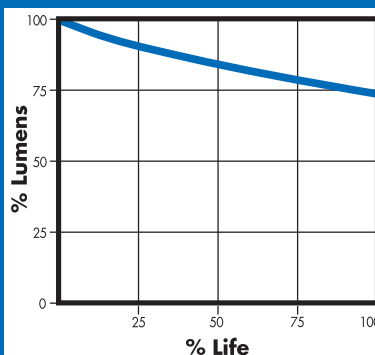

### Lamp Mortality

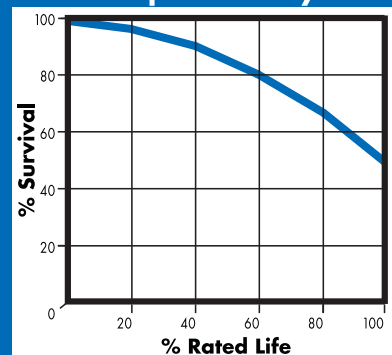

**(800) 451-2606**

7905 Cochran Road, Suite 300  
Glenwillow, Ohio 44139 USA

E-mail: [Venture\\_Lighting@VentureLighting.com](mailto:Venture_Lighting@VentureLighting.com)

**VentureLighting.com**

THIS LAMP CONFORMS TO FEDERAL STANDARD 21 CFR 1040.30  
Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives

**Warning:** This lamp can cause skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when outer envelope is broken or punctured are commercially available.