

70 Watt Pulse Start Lamp

66524 DATA SHEET




UNI-FORM
PULSE START METAL HALIDE LIGHTING SYSTEMS

SUPER PULSE START


Long Life (SPL)

Extended Life Lamps



Universal
Any Position

ED28



Dia. = 3.5" (90mm)
MOL = 8.3" (211mm)
LCL = 5.0" (127mm)
Base = Mogul (EX39)

MPL 70W/U/ED28/PS/740

GENERAL Characteristics

| | |
|--------------------|-----------------------------|
| Lamp Type | MH Pulse Start Single Ended |
| ANSI Code | M98/O |
| Bulb Shape | ED28 |
| Base Type | Mogul (EX39) |
| Bulb Finish | Clear |
| Rated Life | 40000 hours |
| Operating Position | Universal |

ELECTRICAL

| | |
|---------------------------|----|
| Lamp Watts | 70 |
| Lamp Oper. Voltage (Nom.) | 85 |

SUSTAINABILITY

| | |
|-------------------------------------|------|
| Mercury Amount (mg) | 17.0 |
| Picograms of Hg per Mean Lumen Hour | 100 |

PHOTOMETRIC

| | |
|------------------------------------|--------------------------|
| Initial Lumens | 5300 |
| Lumens Per Watt | 76 |
| Lamp Lumen Depreciation (LLD) | 0.80 (80%) @ 16000 hours |
| Correlated Color Temperature | 4000K |
| Chromaticity Coordinates (CIE-x,y) | .385 .390 |
| Color Rendering Index (CRI) R_a | 68 |


PHYSICAL

| | |
|----------------------------|-----------------------|
| Bulb Diameter | 3.5" (90mm) |
| Max. Overall Length (MOL) | 8.3" (211mm) |
| Light Center Length (LCL) | 5.0" (127mm) |
| Effective Arc Length | 10.2mm |
| Max. Base Temperature (°C) | 210 |
| Max. Bulb Temperature (°C) | 400 |
| Socket Pulse Rating (KV) | 4 |
| Luminaire Type | Open / Enclosed Rated |


NOTES

- Lamp performance ratings published in this data sheet are based upon operation with approved electronic ballasts.
- Performance ratings of Universal lamps are based upon Vertical ($\pm 15^\circ$) operation.
- Minimum Starting Temperature: $-40^\circ\text{C}/^\circ\text{F}$.
- To calculate nighttime Scotopic lumens, multiply the lumen rating by the S/P ratio (1.7).


Spectral Distribution

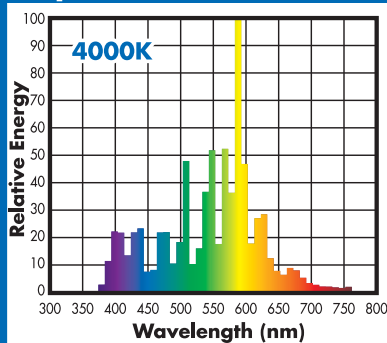

Lumen Maintenance

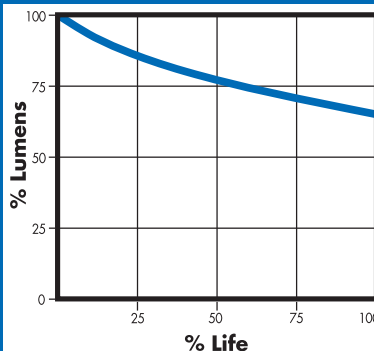

Lamp Mortality

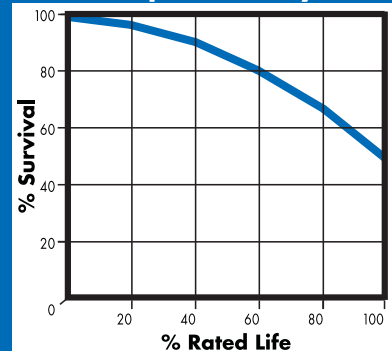

(800) 451-2606

7905 Cochran Road, Suite 300
Glenwillow, Ohio 44139 USA

E-mail: Venture_Lighting@VentureLighting.com

VentureLighting.com

THIS LAMP CONFORMS TO FEDERAL STANDARD 21 CFR 1040.30
Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives

Warning: This lamp can cause skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when outer envelope is broken or punctured are commercially available.