



MH 1000W/U/5K

GENERAL Characteristics

Lamp Type	Standard MH Single Ended
ANSI Code	M47/E
Bulb Shape	BT56
Base Type	Mogul (E39)
Bulb Finish	Clear
Rated Life	9000 hours
Operating Position	Universal
Dimming	50% Rated Power

PHOTOMETRIC

Initial Lumens	80000
Lumens Per Watt	80
Scotopic Lumens (S/P 2.1)	168000
Lamp Lumen Depreciation (LLD)	.65 (65%) @ 3600 hours
Correlated Color Temperature	5000K
Chromaticity Coordinates (CIE-x,y)	.346 .359
Color Rendering Index (CRI)	75

PHYSICAL

Bulb Diameter	7.0" (180mm)
Max. Overall Length (MOL)	15.3" (391mm)
Light Center Length (LCL)	9.5" (241mm)
Effective Arc Length	89.0 mm
Max. Base Temperature (°C)	250
Max. Bulb Temperature (°C)	430
Socket Pulse Rating (KV)	-
Luminaire Type	Enclosed Rated

ELECTRICAL



Lamp Watts	1000
Lamp Oper. Voltage (Nom.)	263

SUSTAINABILITY



Recycling Program	Smartpac® 800-451-2606
-------------------	------------------------

NOTES

Lamp performance ratings published in this data sheet are based on operation with magnetic ballasts. Performance ratings of Universal lamps are based upon Vertical ($\pm 15^\circ$) operation. Dimming applicable only when lamp is installed in the Base Up $\pm 15^\circ$ ($BU \pm 15^\circ$) position. To calculate nighttime Scotopic lumens, multiply the lumen rating by the S/P ratio.



Dia. = 7.0" (180mm)
MOL = 15.3" (391mm)
LCL = 9.5" (241mm)
Base = Mogul (E39)

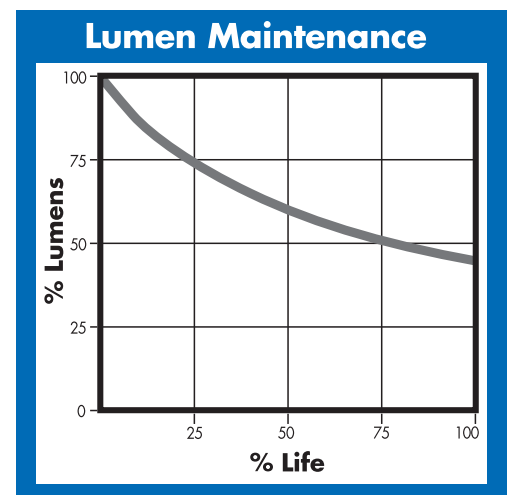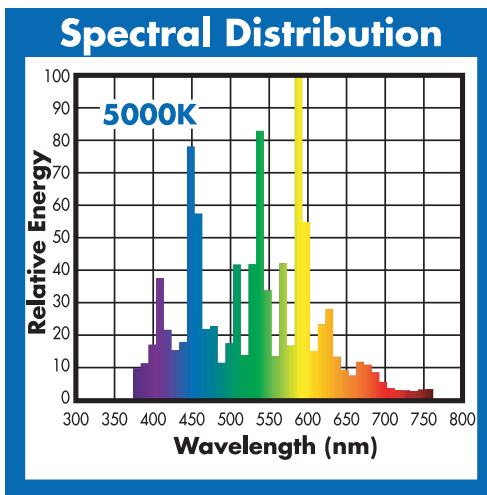

(800) 451-2606
or (440) 248-3510

Fax: (800) 451-2605
7905 Cochran Road
Glenwillow, Ohio 44139 USA
E-mail: venture@adlt.com
VentureLighting.com

THIS LAMP CONFORMS TO FEDERAL STANDARD 21 CFR 1040.30

Warning: This lamp can cause skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when outer envelope is broken or punctured are commercially available.

This Product is Recyclable Through  Smartpac®
FOR RECYCLING PURPOSES