



### MS 1500W/HOR/XP/SPORT 60 GENERAL Characteristics

Lamp Type	Standard MH Single Ended
ANSI Code	M48/E
Bulb Shape	BT56
Base Type	Mogul POMB (EP39)
Bulb Finish	Clear
Rated Life	3000 hours
Operating Position	Horizontal $\pm 60^\circ$

### ELECTRICAL

Lamp Watts	1500
Lamp Oper. Voltage (Nom.)	268
Dimming	

### SUSTAINABILITY

Mercury Amount (mg)	225.0
Picograms of Hg per Mean Lumen Hour	545

### PHOTOMETRIC

Initial Lumens	16200
Lumens Per Watt	108
Lamp Lumen Depreciation (LLD)	0.85 (85%) @ 1200
Correlated Color Temperature	3400K
Chromaticity Coordinates (CIE-x,y)	.410 .390
Color Rendering Index (CRI) $R_a$	70


### NOTES

- Lamp performance ratings published in this data sheet are based upon operation with magnetic ballasts.
- Operation of position-rated lamps outside of their tolerances will result in poor performance.
- Permitted rotation about axis  $\pm 15^\circ$ .
- To calculate nighttime Scotopic lumens, multiply the lumen rating by the S/P ratio (1.4).






### PHYSICAL

Bulb Diameter	7.0" (180mm)
Max. Overall Length (MOL)	15.3" (391mm)
Light Center Length (LCL)	9.5" (241mm)
Effective Arc Length	85.0mm
Max. Base Temperature (°C)	250
Max. Bulb Temperature (°C)	430
Socket Pulse Rating (KV)	-
Luminaire Type	Enclosed Rated



Dia. = 7.0" (180mm)  
 MOL = 15.3" (391mm)  
 LCL = 9.5" (241mm)  
 Base = Mogul POMB (EP39)

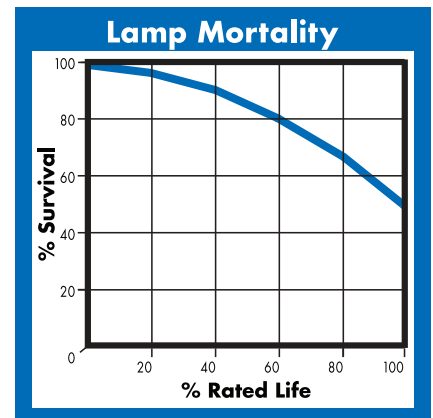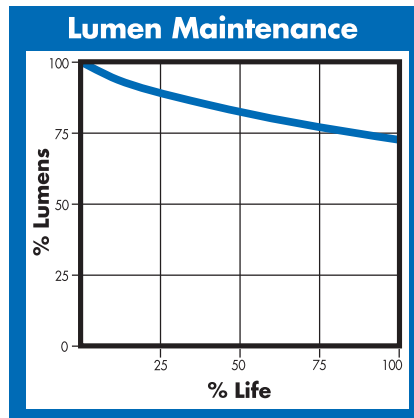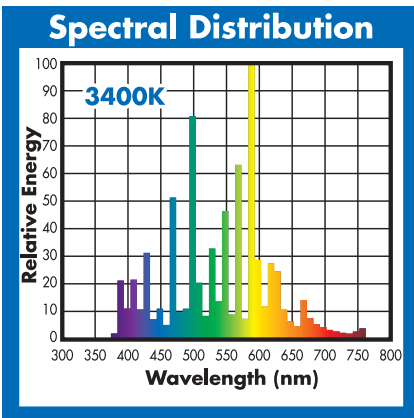

**(800) 451-2606**

6675 Parkland Blvd., Suite 100

Solon, Ohio 44139 USA

E-mail: [Venture\\_Lighting@VentureLighting.com](mailto:Venture_Lighting@VentureLighting.com)

**VentureLighting.com**

THIS LAMP CONFORMS TO FEDERAL STANDARD 21 CFR 1040.30  
Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives

**Warning:** This lamp can cause skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when outer envelope is broken or punctured are commercially available.