



## MS 400W/HOR/T15/3K

### GENERAL Characteristics

Lamp Type	Standard MH Single Ended
ANSI Code	M59/E
Bulb Shape	T15
Base Type	Mogul POMB (EP39)
Bulb Finish	Clear
Rated Life	15000 hours
Operating Position	Horizontal $\pm 45^\circ$
Dimming	N/A

### ELECTRICAL

Lamp Watts	400
Lamp Oper. Voltage (Nom.)	135

### SUSTAINABILITY

Recycling Program	Smartpac® 800-451-2606
-------------------	------------------------

### PHOTOMETRIC


Initial Lumens	38000
Lumens Per Watt	95
Scotopic Lumens (S/P 1.4)	53000
Lamp Lumen Depreciation (LLD)	.65 (65%) @ 6000 hours
Correlated Color Temperature	3200K
Chromaticity Coordinates (CIE-x,y)	.420 .395
Color Rendering Index (CRI)	65

### NOTES



Lamp performance ratings published in this data sheet are based on operation with magnetic ballasts. Performance of position-rated lamps outside of their tolerances will result in poor performance. Permitted rotation about axis  $\pm 15^\circ$ . To calculate nighttime Scotopic lumens, multiply the lumen rating by the S/P ratio.

### PHYSICAL

Bulb Diameter	2.0" (52mm)
Max. Overall Length (MOL)	9.8" (248mm)
Light Center Length (LCL)	5.8" (146mm)
Effective Arc Length	30.9 mm
Max. Base Temperature ( $^\circ\text{C}$ )	210
Max. Bulb Temperature ( $^\circ\text{C}$ )	500
Socket Pulse Rating (KV)	-
Luminaire Type	Enclosed Rated



Dia. = 2.0" (52mm)  
MOL = 9.8" (248mm)  
LCL = 5.8" (146mm)  
Base = Mogul POMB (EP39)

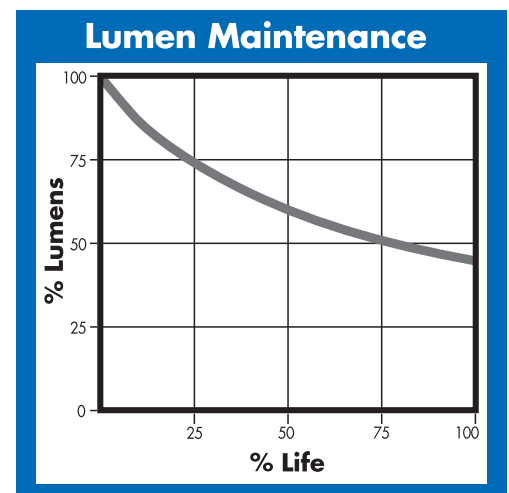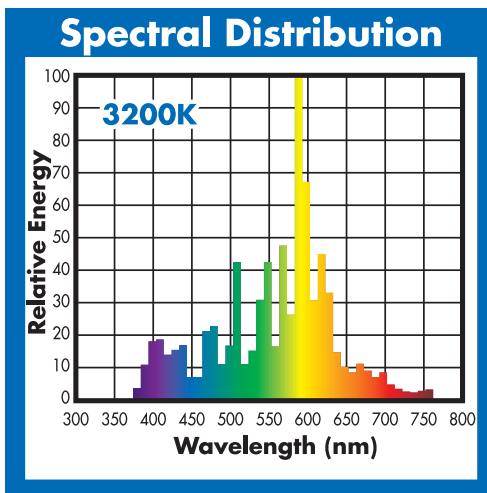

**(800) 451-2606**  
**or (440) 248-3510**

Fax: (800) 451-2605  
7905 Cochran Road  
Glenwillow, Ohio 44139 USA  
E-mail: [venture@adlt.com](mailto:venture@adlt.com)  
**VentureLighting.com**

THIS LAMP CONFORMS TO FEDERAL STANDARD 21 CFR 1040.30

**Warning:** This lamp can cause skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when outer envelope is broken or punctured are commercially available.

This Product is Recyclable Through  Smartpac®  
FOR RECYCLING PURPOSES