

# 175 Watt Probe Start Lamp

# 52522

## DATA SHEET



## MS 175W/C/BU/MED/3K

### GENERAL Characteristics

Lamp Type	Standard MH Single Ended
ANSI Code	M57/E
Bulb Shape	ED17
Base Type	Medium (E26)
Bulb Finish	Coated
Rated Life	10000 hours
Operating Position	Base Up $\pm 15^\circ$
Dimming	50% Rated Power

### ELECTRICAL

Lamp Watts	175
Lamp Oper. Voltage (Nom.)	132

### SUSTAINABILITY

Recycling Program	Smartpac® 800-451-2606
-------------------	------------------------

### PHOTOMETRIC


Initial Lumens	13600
Lumens Per Watt	78
Scotopic Lumens (S/P 1.4)	19000
Lamp Lumen Depreciation (LLD)	.65 (65%) @ 4000 hours
Correlated Color Temperature	3200K
Chromaticity Coordinates (CIE-x,y)	.420 .395
Color Rendering Index (CRI)	70

### NOTES


Lamp performance ratings published in this data sheet are based on operation with magnetic ballasts. Performance of position-rated lamps outside of their tolerances will result in poor performance. Dimming applicable only when lamp is installed in the Base Up  $\pm 15^\circ$  (BU $\pm 15^\circ$ ) position. To calculate nighttime Scotopic lumens, multiply the lumen rating by the S/P ratio.

### PHYSICAL



Bulb Diameter	2.1" (54mm)
Max. Overall Length (MOL)	5.4" (138mm)
Light Center Length (LCL)	3.4" (86mm)
Effective Arc Length	N/A
Max. Base Temperature ( $^\circ\text{C}$ )	210
Max. Bulb Temperature ( $^\circ\text{C}$ )	450
Socket Pulse Rating (KV)	-
Luminaire Type	Enclosed Rated



ED17



Dia. = 2.1" (54mm)  
 MOL = 5.4" (138mm)  
 LCL = 3.4" (86mm)  
 Base = Medium (E26)

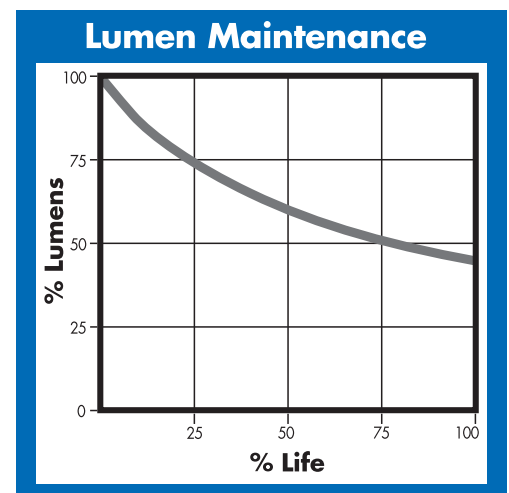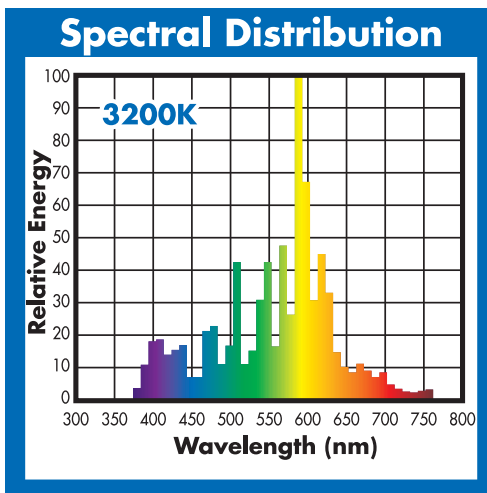

**(800) 451-2606**  
**or (440) 248-3510**

Fax: (800) 451-2605  
 7905 Cochran Road  
 Glenwillow, Ohio 44139 USA  
 E-mail: [venture@adlt.com](mailto:venture@adlt.com)  
**VentureLighting.com**

THIS LAMP CONFORMS TO FEDERAL STANDARD 21 CFR 1040.30

**Warning:** This lamp can cause skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when outer envelope is broken or punctured are commercially available.

This Product is Recyclable Through  Smartpac®

Revision: 09/10/2014 #1488-11