

450 Watt Pulse Start Lamp

65072 DATA SHEET

UNI-FORM PULSE START METAL HALIDE LIGHTING SYSTEMS



UNI-FORM
PULSE START METAL HALIDE LIGHTING SYSTEMS

MP 450W/BU/PS/740

GENERAL Characteristics

Lamp Type	MH Pulse Start Single Ended
ANSI Code	M144/O
Bulb Shape	ED37
Base Type	Mogul (EX39)
Bulb Finish	Clear
Rated Life	30000 hours
Operating Position	Base Up $\pm 15^\circ$

ELECTRICAL

Lamp Watts	450
Lamp Oper. Voltage (Nom.)	135

SUSTAINABILITY



Mercury Amount (mg)	61.0
Picograms of Hg per Mean Lumen Hour	50

PHOTOMETRIC

Initial Lumens	47000
Lumens Per Watt	104
Lamp Lumen Depreciation (LLD)	0.86 (86%) @ 8000
Correlated Color Temperature	4000K
Chromaticity Coordinates (CIE-x,y)	.385 .390
Color Rendering Index (CRI) R_a	68

PHYSICAL

Bulb Diameter	4.6" (120mm)
Max. Overall Length (MOL)	11.5" (292mm)
Light Center Length (LCL)	7.0" (178mm)
Effective Arc Length	43.6 mm
Max. Base Temperature (°C)	230
Max. Bulb Temperature (°C)	450
Socket Pulse Rating (KV)	4
Luminaire Type	Open / Enclosed Rated






ED37

Dia. = 4.6" (120mm)
MOL = 11.5" (292mm)
LCL = 7.0" (178mm)
Base = Mogul (EX39)

NOTES

- Lamp performance ratings published in this data sheet are based upon operation with approved electronic ballasts.
- Operation of position-rated lamps outside of their tolerances will result in poor performance.
- Minimum Starting Temperature: -40°C/°F.
- To calculate nighttime Scotopic lumens, multiply the lumen rating by the S/P ratio (1.7).

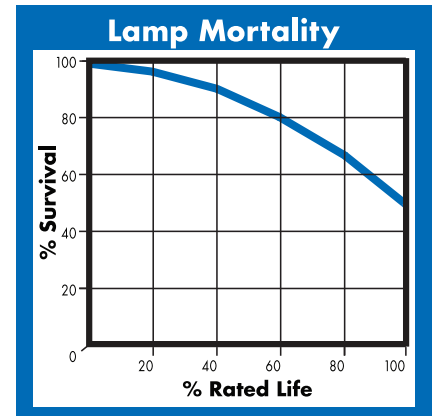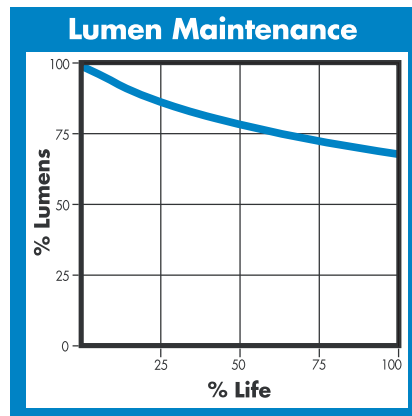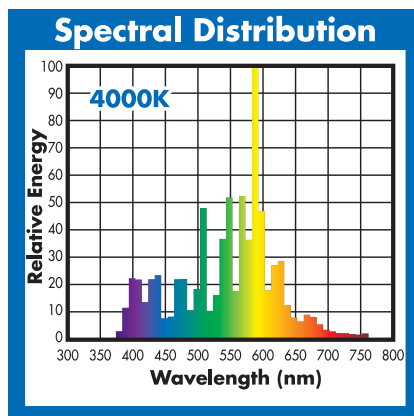

(800) 451-2606

6675 Parkland Blvd., Suite 100
Solon, Ohio 44139 USA

E-mail: Venture_Lighting@VentureLighting.com

VentureLighting.com

THIS LAMP CONFORMS TO FEDERAL STANDARD 21 CFR 1040.30
Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives

Warning: This lamp can cause skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when outer envelope is broken or punctured are commercially available.