



MH 175W/C/U

GENERAL Characteristics

| | |
|--------------------|--------------------------|
| Lamp Type | Standard MH Single Ended |
| ANSI Code | M57/E |
| Bulb Shape | ED28 |
| Base Type | Mogul (E39) |
| Bulb Finish | Coated |
| Rated Life (V) | 10000 hours |
| Rated Life (H) | 7500 hours |
| Operating Position | Universal |

ELECTRICAL

| | |
|---------------------------|-----|
| Lamp Watts | 175 |
| Lamp Oper. Voltage (Nom.) | 132 |

SUSTAINABILITY


| | |
|---|------|
| Mercury Amount (mg) | 24.0 |
| Picograms of Hg per Mean Lumen Hour (V) | 279 |

PHOTOMETRIC

| | |
|------------------------------------|-------------------------|
| Initial Lumens / LPW (V) | 13300 / 76 |
| Initial Lumens / LPW (H) | 12000 / 69 |
| Lamp Lumen Depreciation (LLD) | 0.65 (65%) @ 4000 hours |
| Correlated Color Temperature | 3700K |
| Chromaticity Coordinates (CIE-x,y) | .395 .390 |
| Color Rendering Index (CRI) R_a | 70 |

NOTES


- Lamp performance ratings published in this data sheet are based upon operation with magnetic ballasts.
- Performance ratings of Universal lamps are based upon Vertical ($\pm 15^\circ$) operation.
- Dimming applicable only when lamp is installed in the Base Up $\pm 15^\circ$ (BU $\pm 15^\circ$) position.
- To calculate nighttime Scotopic lumens, multiply the lumen rating by the S/P ratio (1.7).






PHYSICAL

| | |
|--|----------------|
| Bulb Diameter | 3.5" (90mm) |
| Max. Overall Length (MOL) | 8.3" (211mm) |
| Light Center Length (LCL) | 5.0" (127mm) |
| Effective Arc Length | N/A |
| Max. Base Temperature ($^\circ\text{C}$) | 210 |
| Max. Bulb Temperature ($^\circ\text{C}$) | 400 |
| Socket Pulse Rating (KV) | - |
| Luminaire Type | Enclosed Rated |

ED28



Dia. = 3.5" (90mm)
MOL = 8.3" (211mm)
LCL = 5.0" (127mm)
Base = Mogul (E39)

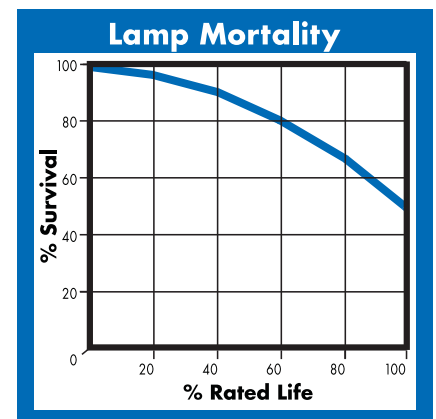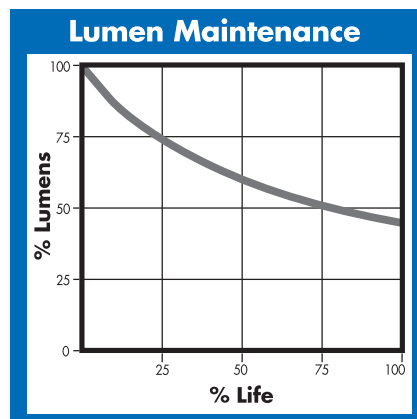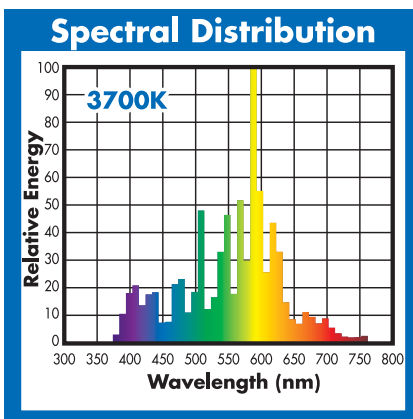

(800) 451-2606

7905 Cochran Road, Suite 300

Glenwillow, Ohio 44139 USA

E-mail: Venture_Lighting@VentureLighting.com

VentureLighting.com

THIS LAMP CONFORMS TO FEDERAL STANDARD 21 CFR 1040.30
Complies with (CE), Low Voltage (CE), WEEE and RoHS Directives

Warning: This lamp can cause skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Lamps that will automatically extinguish when outer envelope is broken or punctured are commercially available.